

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
29 April 2004 (29.04.2004)

PCT

(10) International Publication Number
WO 2004/035286 A1

(51) International Patent Classification⁷: **B29C 39/36**,
41/40, 45/40, B25J 5/06

(74) Agents: **REYIER, Ann-Mari et al.**; Bjerkéns Patentbyrå
KB, Box 128, S-721 05 Västerås (SE).

(21) International Application Number:
PCT/SE2003/001590

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(22) International Filing Date: 14 October 2003 (14.10.2003)

(25) Filing Language: Swedish

(26) Publication Language: English

(30) Priority Data:
0203075-7 17 October 2002 (17.10.2002) SE

(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

(71) Applicant (*for all designated States except US*): **COOL TOOL HOLDING AB** [SE/SE]; Kopparlunds vägen 3, S-722 17 Västerås (SE).

Published:


— with international search report

(72) Inventor; and

(75) Inventor/Applicant (*for US only*): **WENNBERG, Mikael** [SE/SE]; Skultunavägen 32, S-722 17 Västerås (SE).

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: A DEVICE AND A METHOD FOR REMOVING AN OBJECT FROM A MOULDING TOOL

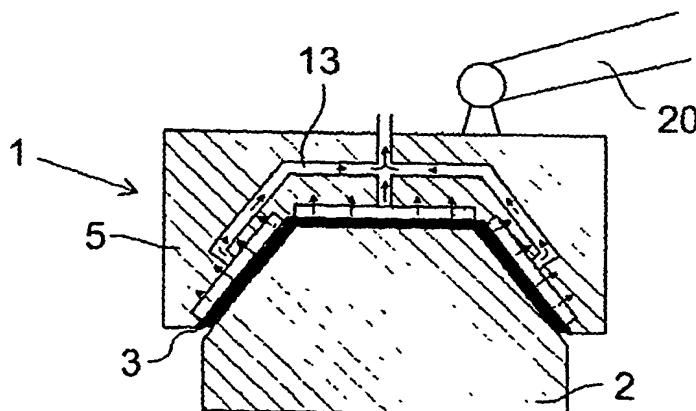

(57) **Abstract:** A device (1) and a method for removing an object from a moulding tool (2) in connection with casting or moulding an object, wherein there is a retaining force between the moulding tool and the object. The device comprises a body (5), coupling means (13) arranged for coupling the object to the body and means (20) for applying a traction force on the object, which is substantially opposite to said retaining force, wherein the body is designed with a contact surface adapted for at least partly being in contact with the object, and the coupling means is arranged to couple the object to the contact surfaces such that said traction force becomes substantially uniformly distributed over the part of the surface of the object that is in contact with the contact surface.